



TBD.RMT-CCT-T3X

The TBD CCT Control System provides wireless control for color-changing RGB LED lights. Allows for distinct zones of color-changing patterns, or static color. Suitable for an installation with multiple areas of display, or for a single area requiring multiple remotes. The system offers the option of a remote with receiver, or receiver with built-in controller. Dry location use.

01 TECH SPECS

Remote T3X




- Input Voltage: 5-24V DC (constant voltage)
- Max Current Load: 5Ax4CH 20A Max
- Max Output Power: 100W / 240W / 480W (5V/12V/24V)
- Control Type: PWM (Pulse Width Modulation)
- Ambient Temperature: -22°~122°F (-30°~50°C)
- Operating Temperature: -22°~131°F (-30°~55°C)
- Environment: Indoor / Dry Location
- Dimensions: 6.9 x 1.8 x 1.2 in. (L x W x H)
- Operating Temperature: -4°~131°F (-20°~55°C)
- Weight (G.W.): 3.9 oz.



TBD.RCV-CCT-T3-5A



TBD.RCV-CCT-T3-CV

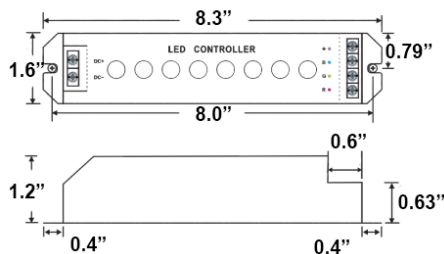

Receiving Controller T3-5A

- Input Voltage: DC5V (Built-in Lithium Battery)
- Frequency: 2.4GHz
- Transmitting Distance: 99 ft
- Standby Time: ≤6 months
- Remote Option: Sync or Zone Control (8 zones)
- Dimension: 5.7 x 2.2 x 0.8 in. (L x W x H)
- Weight (G.W.): 7 oz.
- Ambient Temperature: -4°~122°F (-20°~50°C)
- Operating Temperature: -4°~131°F (-20°~55°C)

Receiving Controller T3-CV

- Input voltage: DC5V-DC24V
- Max current load: 6A×3CH Max 18A
- Max output power: 90W/216W/432W(5V/12V/24V)
- Compatible remote control: TBD.RMT-CCT
- Working temperature: -30°~55°
- Dimension: L 6.89" ×W 1.73"×H 1.18"
- Package size: L 7.0"×W 1.89" ×H 1.3"
- Weight (G.W.): 5.3 oz.

02 LEARNING ID METHOD OF REMOTE CONTROL

TBD.RCV-CCT-T3-5A learning ID:

1. Turn on the receiver and remote control.
2. Press “on/off button” on the TBD.RCV-CCT-T3-5A for 2 seconds, there is a buzzer sound, and do not release your hand on the button, at the same time press any keys on the remote control(except on/off key), until the green indicator light of remote control flashes 3 times(a voice prompt at the same time), release all the keys.

TBD.RCV-CCT-T3-5A cancelling ID:

1. Turn on the receiver and remote control.
2. Press “on/off button” on the TBD.RCV-CCT-T3-5A for 2 seconds, there is a buzzer sound, and do not release your hand on the button, after 5 seconds press any keys on the remote control(except on/off key), until the red indicator light of remote control flashes 3 times(a voice prompt at the same time), release all the keys.

TBD.RCV-CCT-T3-CV learning ID:

1. Turn on the receiver and remote control.
2. Short press “ID learning button” on the TBD.RCV-CCT-T3-CV receiver, the running light keeps on, then long press any keys (except on/off key)on the remote, the running light returns to flash (the buzzer long beep, the green light flashes 3 times), activated successful.


TBD.RCV-CCT-T3-CV cancelling ID:

1. Turn on the receiver and remote control.
2. Press “ID learning button” on the receiver more than 8 seconds, the buzzer beep twice, delete all the learned remote.

NOTE: If you have to control many receivers synchronously, each receiver should be learning ID according to the above steps learning ID.


Operation Panel and Component Instruction on Next Page

03 OPERATION PANEL AND COMPONENT INSTRUCTION

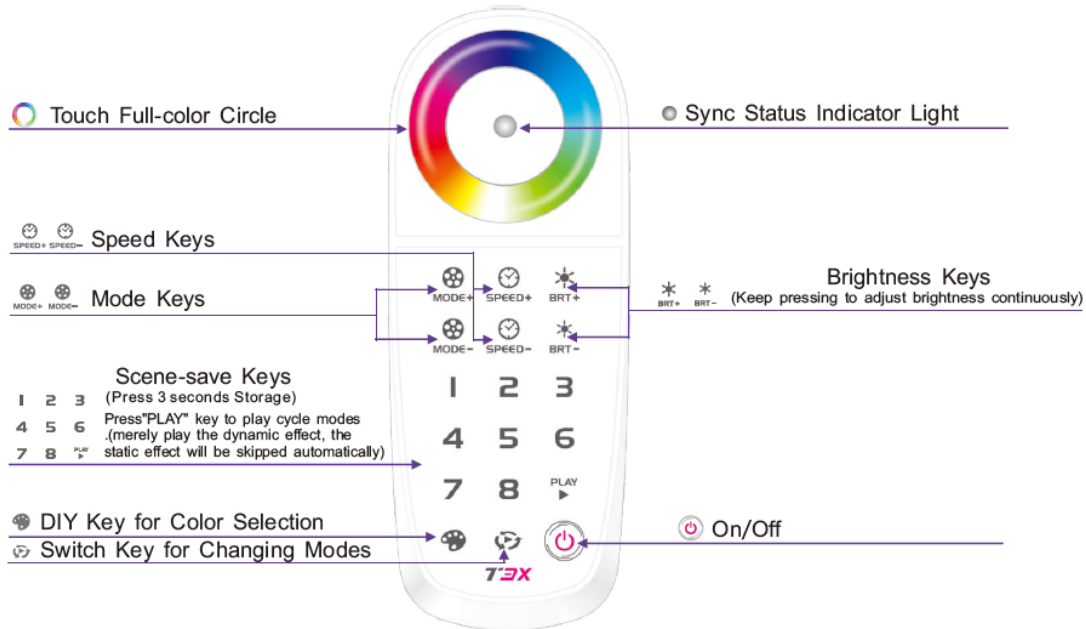

DIY Key for Color Selection

- Long press "DIY key for color selection" for 2 seconds to enter DIY programming function.
 1. Select any color on "touch full-color circle", the controller will save immediately.
 2. Press "DIY key for color selection" to enter next color.(can save 1-10 colors)
 3. After color selection, press"Switch key for changing modes" to switch jumping, smooth or flickering changing effect.
 4. Adjust the brightness and the speed by pressing the "SPEED" and "BRT"
 5. Save the new program into the "Scene-save keys".
- Additional Functions
 1. Press "MODE" key under DIY function, can display the standard color for black, red, green, blue, yellow, purple, cyan and white. Among them, black can be used for editing fade in dimming effect, etc.
 2. Long press "DIY key for color selection" to clear the current color.
- Press "Scene-save Key" in 3 seconds, the buzzer can be on or off.

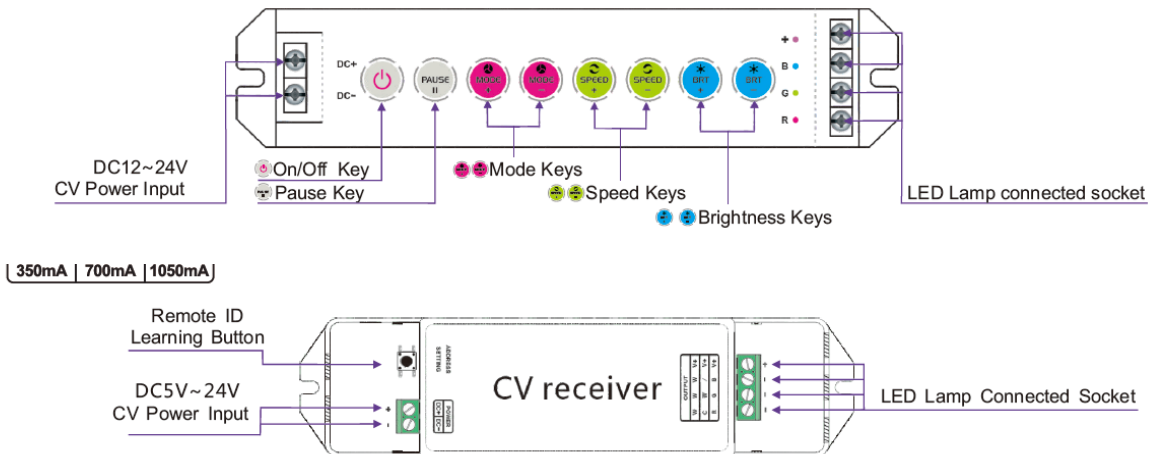

04 OTHER SPECIAL FUNCTIONS

A. Reset Function:

- Feature:** Reset function is available when remote operates abnormally.
Operation: Long press simultaneously, release the 2 keys after 3 seconds, the remote will auto off, means reset completed. and then could restart the remote.

B. Check and Edit the Frequency Point on the Remote:

- Feature:** a. Revising the frequency point to eliminate the external disturbance. 12 revisable frequency points for user.
 b. Multiple remotes sync-control becomes available when they use the same frequency point.

NOTE: After reset or revised the frequency points in the remote, receivers only can be used after relearn the ID.

Check the Frequency Point on the Remote:

Turn on the remote, long press the on/off key for 5 seconds until the red light flashes 3 times, and then the green light flashes, the numbers of the green flash will be the frequency point of the remote. you can only edit the frequency point after 3 seconds.

Edit the Frequency Point on the Remote: In frequency changing state

Method 1: short press any key from 1-8 and key, the frequency point will be 1-9 correspondingly(represent 9), the green light will flash in the same numbers. Press again any key or touch the color circle to exit the frequency edit state.


Method 2: long press “on/off” key over 5 seconds, the green light flashes, the flash times plus 1 means the frequency point accumulate 1. In short, long press the “on/off” key 5 seconds each time, the frequency point will accumulate 1, which will again become value 1 when added to 12, and that cycle repeats.

05 TABLE OF CHANGING MODE


No.	Mode	Description	No.	Mode	Description
1	Static Red	Brightness Adjustable	17	Cyan Fade out and Fade in	Speed/Brightness Adjustable
2	Static Green	Brightness Adjustable	18	White Fade out and Fade in	Speed/Brightness Adjustable
3	Static Blue	Brightness Adjustable	19	RGB Fade out and Fade in	Speed/Brightness Adjustable
4	Static Yellow	Brightness Adjustable	20	Red Green Color Smooth	Speed/Brightness Adjustable
5	Static Purple	Brightness Adjustable	21	Red Blue Color Smooth	Speed/Brightness Adjustable
6	Static Cyan	Brightness Adjustable	22	Green Blue Color Smooth	Speed/Brightness Adjustable
7	Static White	Brightness Adjustable	23	Red Yellow Color Smooth	Speed/Brightness Adjustable
8	RGB Skipping	Speed/Brightness Adjustable	24	Green Cyan Color Smooth	Speed/Brightness Adjustable
9	7 Colors Skipping	Speed/Brightness Adjustable	25	Blue Purple Color Smooth	Speed/Brightness Adjustable
10	White Strobe	Speed/Brightness Adjustable	26	Green Yellow Color Smooth	Speed/Brightness Adjustable
11	7 Colors Strobe	Speed/Brightness Adjustable	27	Blue Cyan Color Smooth	Speed/Brightness Adjustable
12	Red Fade out and Fade in	Speed/Brightness Adjustable	28	Red Purple Color Smooth	Speed/Brightness Adjustable
13	Green Fade out and Fade in	Speed/Brightness Adjustable	29	Blue White Color Smooth	Speed/Brightness Adjustable
14	Blue Fade out and Fade in	Speed/Brightness Adjustable	30	Yellow Purple Cyan Color Smooth	Speed/Brightness Adjustable
15	Yellow Fade out and Fade in	Speed/Brightness Adjustable	31	RGB Color Smooth	Speed/Brightness Adjustable
16	Purple Fade out and Fade in	Speed/Brightness Adjustable	32	Full-color Smooth	Speed/Brightness Adjustable

06 SYSTEM DIAGRAM

Unlimited receivers can be installed within effective distance, no wiring needed between the receivers, which can be less or more in quantity according to your need for the installation, if you want to increase or decrease the receivers, just activate or cancel the control ID on the remote control will be fine, no any changes and effects on other receivers.

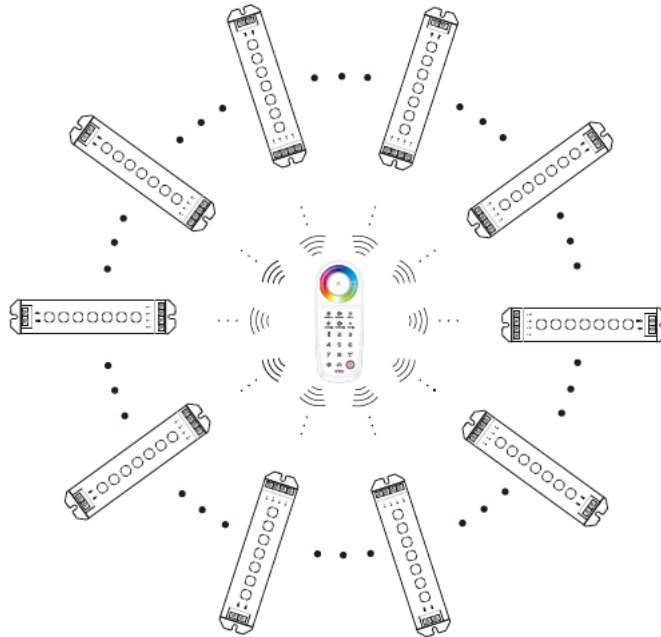

07 WIRING DIAGRAM

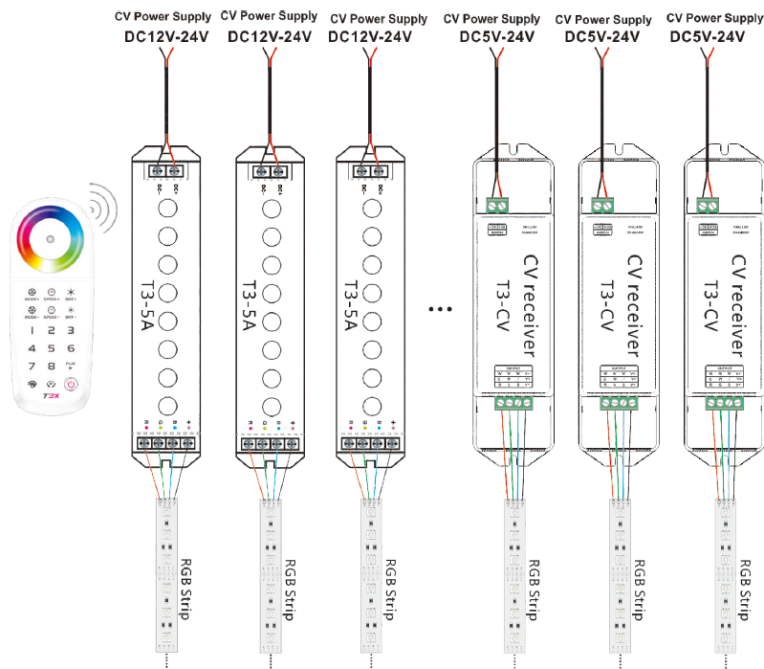

08 CHARGING METHODS FOR REMOTE CONTROL

1. When charging, please connect USB cable to the mobile charger or computer with the USB interface.
2. The blue indicator light flickers while charging, and turns green means the charging is completed. The remote control can be chargeable even at the OFF state, on which the indicator light is dark.
3. No memory effect in the lithium battery of remote control. Follow the standard charging procedure even for the first three times, no need over charge.
4. Red indicator light flickers meaning low battery and need to be charged. charging in low battery will affect life of battery.
5. The remote should be full charged and stored under low cold drying while a long time without being operated. And please full recharge every 3 months.

09 ATTENTION

1. The product shall be installed and serviced by a qualified person.
2. This product is non-waterproof. Please avoid the sun and rain. When installed outdoors please ensure it is mounted in a water proof enclosure.
3. Good heat dissipation will prolong the working life of the controller. Please ensure good ventilation.
4. Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
5. Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
6. Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
7. If a fault occurs please return the product to your supplier. Do not attempt to fix this product by yourself.